





# TYGRIT™ CUTTER SHIELDS

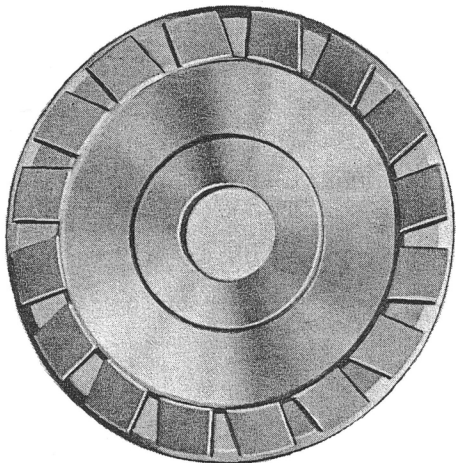

8F 610 BB 1572◇

For regular diameter (1 23/32") Tygrit cutters — corrugated — the high blocks cover the thickness of the lip and allow more extension

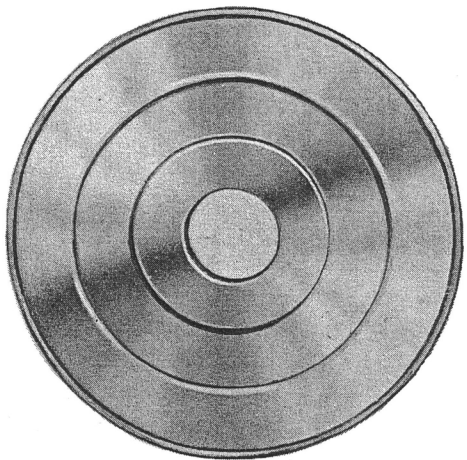

7 1591◇A

For regular diameter (1 23/32") Tygrit cutters — rim type — recessed so that rim covers thickness of the lip — usually used for close edge work on women's shoes — 25 1598◇ rim shield is recommended for 2" diameter Tygrit cutters

## FOREPART SHIELDS FOR USE WITH TYGRIT CUTTERS

Two types of forepart shields, corrugated and rim, are used with both the standard 1 23/32" lip diameter Tygrit cutters and the 2" diameter as well.

Corrugated shields are effective for removing cement and dust lodged between the sole and upper. The thickness of the cutter lip is reduced while larger sizes provide added extension when required and the corrugations are angled to fit the special grooves used on Tygrit cutters. Style F-610 BB-1572◇ should be specified for the regular lip diameter cutter. Normal stock sizes are 7½, 8, 8½, and 9 with size 8 recommended for new cutters and 8½ or 9 for extension work. F-610 BB-1594◇ — size 25 is used with the larger 2" diameter cutters.

Rim type shields are also used to reduce the thickness of the cutter lip on curved shapes for close edge work. The shield is recessed with the rim covering the top of the cutter lip. Identified as style 1591◇A, rim type shields are stocked in sizes 7 and 7½ for use with regular 1 23/32" cutters with size 7 recommended for new 80 or 100 grit cutters. Style 1591◇C has a deeper recess for 60 grit cutters. Style 1598◇ — size 25 should be specified for the 2" diameter 1570◇H Tygrit 80 and 100 grit and 1598◇A size 25 for 60 grit.

### HOW TO ORDER SHIELDS FOR TYGRIT CUTTERS

Provide complete markings for sizes and styles.

**EXAMPLE:**

- 1 Corrugated Shield Size 8 F-610BB 1572◇
- 1 Rim Shield Size 7 1591◇A
- 1 Rim Shield Size 25 1598◇